




Distributer za BiH: ZE-TEHNA doo Zenica

+387 32 203 620, ze_tehna@bih.net.ba , www.zetehna.com.ba

Nova generacija Reducir Ventila - DIN CONTROL prema DIN EN ISO 2503

Visoko kvalitetni manometar ulaznog tlaka prema DIN EN 562

Visoko kvalitetni manometar izlaznog tlaka prema DIN EN 562

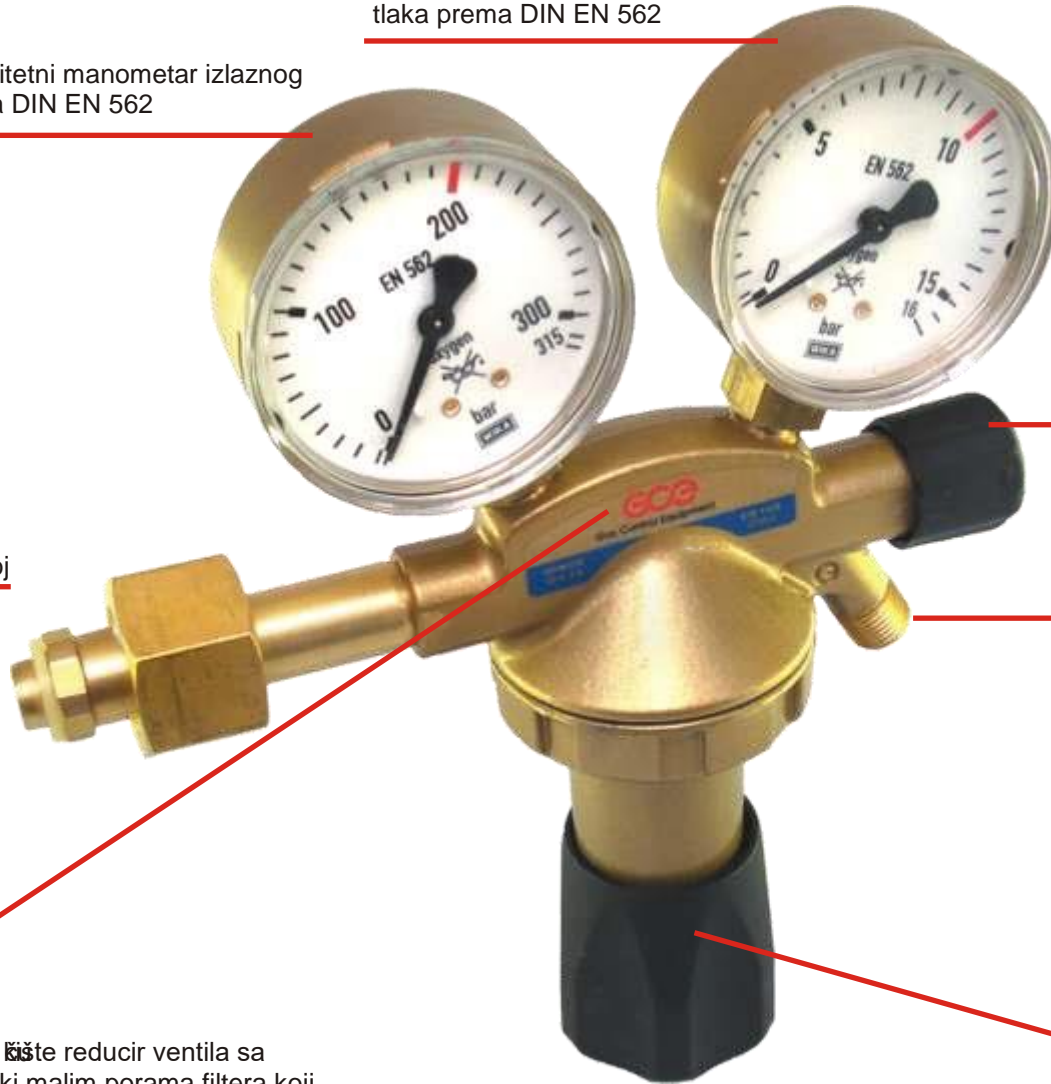

Fina regulacija izlaznog ventila sa o-ring brtvom

Vrlo dobar protok, veći od 30 m³/h

Izlazni navoj

Priključak na bocu prema standardu za svaki plin posebno

Sigurnosno kiste reducir ventila sa mikroskopski malim porama filtera koji sprječava ulaz nečistoćama i talogu

Ergonomski oblikovana rucica ventila





Distributer za BiH: **ZE-TEHNA doo Zenica**

+387 32 203 620, ze_tehna@bih.net.ba, www.zetehna.com.ba

	Tip ventila /plin Type of valves / Gas	Ulazni pritisak Inlet pressure (bar)	Izlazni pritisak Outlet pressure (bar)	Protok Flow rate (m ³ /h)	Ulazni prihvati Inlet connection	Izlazni prihvati Outlet connection	Težina Weight (kg)
šifra: 82	 Kisek DIN+ OX 03 / <i>Oxygen DIN+ OX 03</i>	200	10	30	W21,8 x 1/14"	G 1/4"	1,54
šifra: 1459	Kisek DIN+ OX 05 / <i>Oxygen DIN+ OX 05</i>	200	20	60	W21,8 x 1/14"	G 1/4"	1,54
šifra: 83	 Acetilen DIN+ ACA2 / <i>Acetylene DIN+ ACA2</i>	25	1,5	5	stremen	G 3/8" LH	1,865
šifra: 2180	Zrak DIN+ AIR D3 / <i>Air DIN+ AIR D3</i>	200	10	30	G 5/8" (vanjski)	G 1/4"	1,54
šifra: 20854	Zrak DIN+ AIR D5 HP / <i>Air DIN+ AIR D5</i>	200	20	60	G 5/8" (vanjski)	G 1/4"	1,54
šifra: 20855	Zrak DIN+ AIR D HP / <i>Air DIN+ AIR D HP</i>	200	30	100	G 5/8" (vanjski)	G 1/4"	1,55
šifra: 2181	Vodik DIN+ HYD H3 / <i>Hydrogen DIN+ HYD H3</i>	200	10	30	W21,8 x 1/14" LH	G 3/8" LH	1,54
šifra: 85	 Dušik DIN+ NIT N3 / <i>Nitrogen DIN+ NIT N3</i>	200	10	30	W24,32 x 1/14"	G 1/4"	1,54
šifra: 2065	Dušik DIN+ NIT N HP / <i>Nitrogen DIN+ NIT N HP</i>	200	30	100	W24,32 x 1/14"	G 1/4"	1,55
šifra:	Dušični oksidul DIN+ NIO O3 / <i>Nitrous Oxide DIN+ NIO O3</i>	200	10	30	G 3/8"	G 1/4"	1,54
šifra: 86	 Argon/CO2 DIN+ ARC N2 / <i>Argon/CO2 DIN+ ARC N2</i>	200	-	0-32 l/min	W21,8 x 1/14"	G 1/4"	1,54
šifra: 20401	 Argon DIN+ FLOW N0 sa mjačačem protoka <i>Argon DIN+ FLOW N0 with a float-type flowmeter</i>	200	-	3-30 l/min	W21,8 x 1/14"	G 1/4"	1,6
šifra:	Ugljični dioksid DIN+ ARC N2 / <i>CO2 DIN+ ARC N2</i>	200	-	0-32 l/min	G 3/4"	G 1/4"	1,54
šifra: 20551	 Ugljični dioksid CO2 DIN+ FLOW 11 Sa mjačačem protoka i grijačem 24 V <i>Carbon Dioxide CO2 DIN+ FLOW N0 with a float-type flowmeter and a preheater 24 V</i>	200	-	3-30 l/min	G 3/4"	G 1/4"	2,095
šifra: 84	 P2 propan-butan / <i>P2 propane-butane</i>	25	4	16	W21,8 x 1/14" LH	G 3/8" LH	0,580
šifra: 20693	Former gases DIN+ Form H2	200	-	5-50 l/min	W21,8 x 1/14" LH	G 3/8" LH	1,6